

CI Series Pump | Submittal Data

Submittal No: 301-1339D | Model: 5011D | RPM: 1160 - 60 Hz | Effective: January 27, 2020 | Supersedes: April 30, 2019

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ MODEL NO. 5011D

IMPELLER DIAMETER _____ HORSEPOWER _____

GPM _____ VOLTAGE _____

HEAD/FT _____ RPM 1160

WEIGHT _____ PUMP/MOTOR _____

DIMENSIONS

Model No. | 5011D

Flange Size (Suction x Discharge) | 6 x 5 (152 x 127)

HORSEPOWER		5	7.5	10
ODP	MOTOR FRAME	215JM	254JM	256JM
	G MAX	16.60 (422)	19.44 (494)	
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	433 (197)	530 (240)	
TEFC	MOTOR FRAME	215JM	254JM	256JM
	G MAX	18.11 (460)	20.05 (509)	
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	433 (197)	530 (240)	
A		ANSI Class 125: 5.17 (131)		
		ANSI Class 250: 5.55 (141)		
B		ANSI Class 125: 14.95 (380)		
		ANSI Class 250: 15.38 (391)		
C (MOTOR)		8.5 (216)	10.0 (254)	
D		8.0 (203)	9.5 (241)	11.75 (298)
E		5.25 (133)	6.25 (159)	
F		9.84 (250)		
H (PUMP)		12.4 (315)		
J		4.72 (120)		
K		ANSI Class 125: 2.81 (71)		
		ANSI Class 250: 3.19 (81)		
L		7.16 (182)	8.34 (212)	
N (PUMP)		0.5 (13)		
P		0.41 (10)	0.53 (13)	
R		7.0 (178)	8.25 (210)	
S		ANSI Class 125: 10.20 (259)	ANSI Class 125: 10.87 (276)	
		ANSI Class 250: 10.58 (269)	ANSI Class 250: 11.25 (286)	

Configuration	DOE Basic Model Number	PEI Value		Energy Rating
Bare Pump	N/A	PEI _d	N/A	N/A
Pump + Motor	N/A	PEI _d	N/A	N/A

N/A=NOT WITHIN DOE SCOPE



OPERATING SPECIFICATIONS

FLANGE	PRESSURE	TEMPERATURE
ANSI Class 125	175 PSIG* (1210 KPA)	250°F (120°C)
ANSI Class 250	300 PSIG** (2070 KPA)	250°F (120°C)

Motors: All NEMA Standard (JM Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250

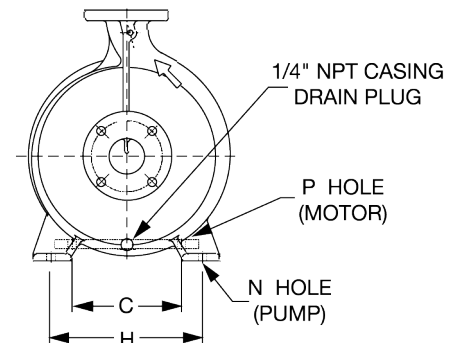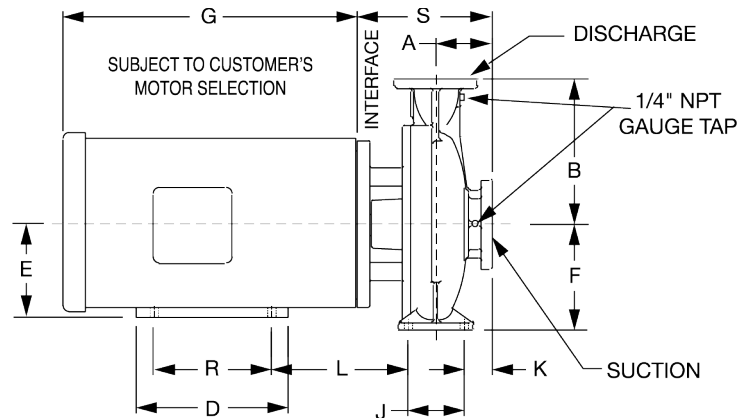

MATERIALS OF CONSTRUCTION		CASING	COVER	IMPELLER	WEAR RING	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL	SEAL FLUSH LINE ASSEMBLY
STANDARD CONSTRUCTION	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
	250# FLANGE	Ductile Iron ASTM A536-84 Grade 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
OPTIONAL	125# OR 250#	N/A	N/A	Stainless Steel ASTM A351/A 351M-08	Bronze ASTM B584-98A C92200	N/A	Stainless Steel TYPE 303 ASTM A276	Tyngsten Carbide /EPT or Silicon-Carbide/EPT	Copper & Brass C3600

N/A - Not Available




CI Series | Model: 5011D | 1160 RPM

Curve No. 4269 | Min. Imp. Dia. 8.0" | Size 6x5x11.0 | January 27, 2020

Comfort Solutions®
A Taco Family Company

Energy Efficiency Rating: DOE Basic Model Number: N/A @1160RPM
Pump & Motor: PE_{CL}: N/A @1160RPM

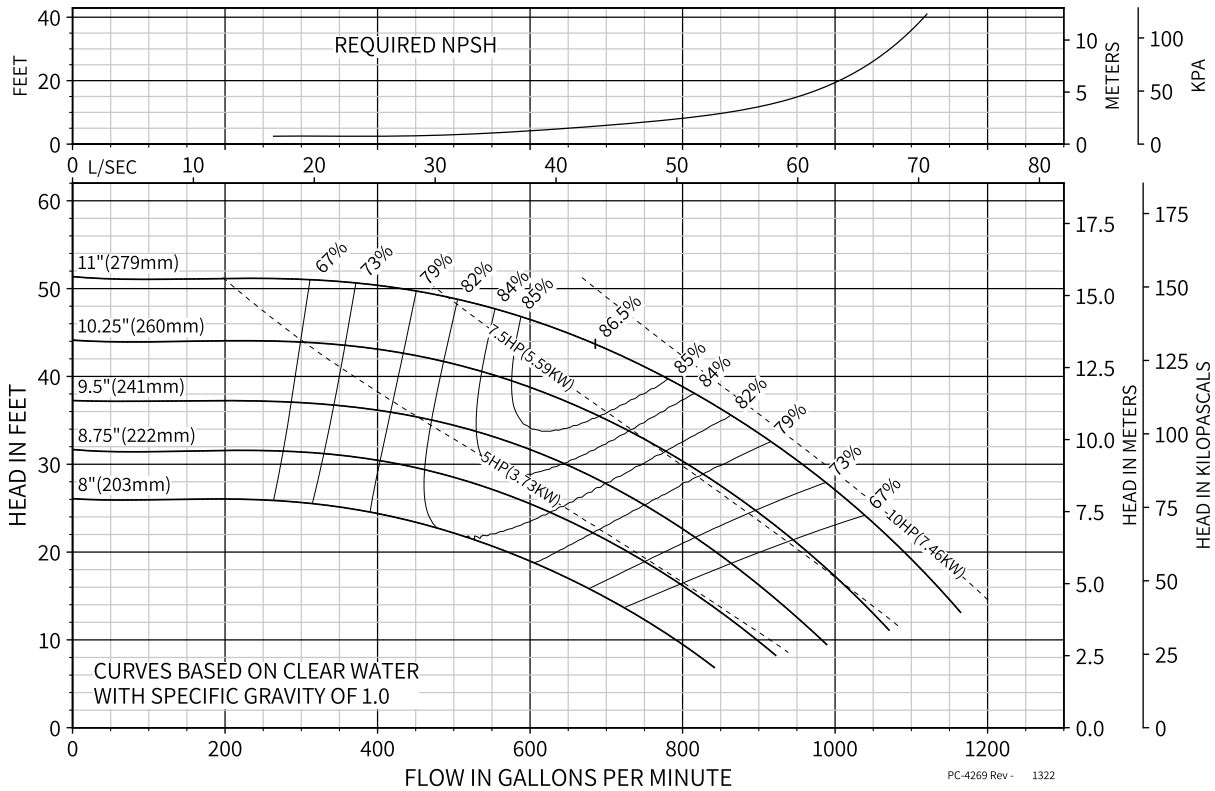

COMMENTS