

CI Series Pump | Submittal Data

Submittal No: 301-1344D | Model: 2513D | RPM: 1760 - 60 Hz | Effective: January 27, 2020 | Supersedes: May 30, 2019

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ MODEL NO. 2513D

IMPELLER DIAMETER _____ HORSEPOWER _____

GPM _____ VOLTAGE _____

HEAD/FT _____ RPM 1760

WEIGHT _____ PUMP/MOTOR _____

NSF 61 CERTIFIED YES NO

DIMENSIONS

Model No. | 2513D

Flange Size (Suction x Discharge) | 3 x 2 1/2 (76 x 64)

HORSEPOWER		10	15	20	25	30
ODP	MOTOR FRAME	215JM	254JM	256JM	284JM	286JM
	G MAX	16.60 (422)	19.44 (494)		20.69 (526)	
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	438 (199)	624 (283)		739 (335)	
TEFC	MOTOR FRAME	215JM	254JM	256JM	284JM	286JM
	G MAX	18.11 (460)	20.05 (509)		23.38 (594)	
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	438 (199)	624 (283)		739 (335)	
A		ANSI Class 125: 4.72 (120)				
		ANSI Class 250: 5.09 (129)				
B		ANSI Class 125: 12.23 (311)				
		ANSI Class 250: 12.54 (319)				
C (MOTOR)		8.5 (216)	10.0 (254)		11.0 (279)	
D		8.0 (203)	9.5 (241)	11.75 (298)	10.75 (273)	12.25 (311)
E		5.25 (133)	6.25 (159)		7.00 (178)	
F		9.84 (250)				
H (PUMP)		12.40 (315)				
J		4.72 (120)				
K		ANSI Class 125: 2.36 (60)				
		ANSI Class 250: 2.73 (69)				
L		7.50 (190)	8.26 (210)			
N (PUMP)		0.56 (14)				
P		0.41 (10)	0.53 (13)			
R		7.00 (178)	8.25 (210)	10.0 (254)	9.5 (241)	11.0 (279)
S		ANSI Class 125: 9.83 (250)	ANSI Class 125: 10.34 (263)			
		ANSI Class 250: 10.20 (259)	ANSI Class 250: 10.71 (272)			

Configuration	DOE Basic Model Number	PEI Value		Energy Rating
Bare Pump	CI6013D-4P-BP	PEI _d	0.89	11
Pump + Motor	CI6013D-4P-PM	PEI _d	0.89	11



OPERATING SPECIFICATIONS

FLANGE	PRESSURE	TEMPERATURE
ANSI Class 125	175 PSIG* (1210 KPA)	250°F (120°C)
ANSI Class 250	300 PSIG** (2070 KPA)	250°F (120°C)

Motors: All NEMA Standard (JM Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250

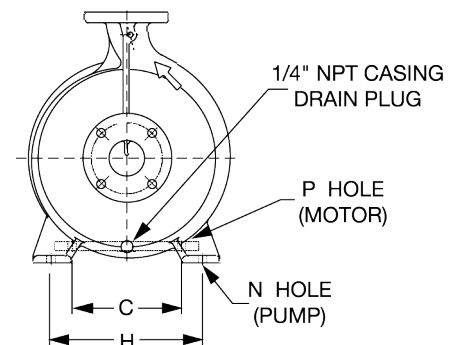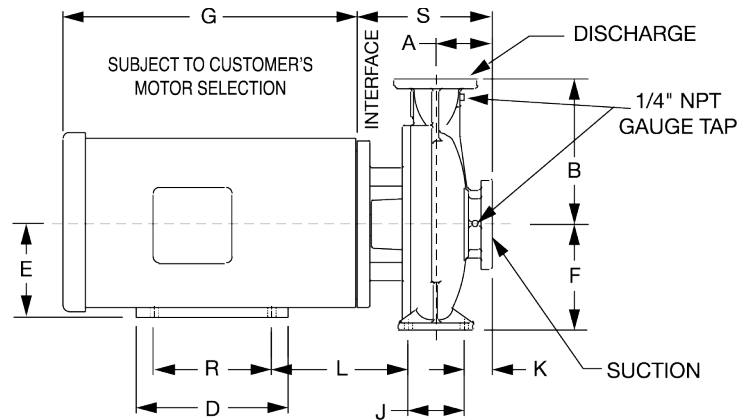

MATERIALS OF CONSTRUCTION			CASING	COVER	IMPELLER	WEAR RING	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL	SEAL FLUSH LINE ASSEMBLY
STANDARD CONSTRUCTION	BRONZE FITTED	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
		250# FLANGE	Ductile Iron ASTM A536-84 Grade 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
OPTIONAL		125# OR 250#	N/A	N/A	Stainless Steel ASTM A351/A 351M-08	Bronze ASTM B584-98A C92200	N/A	Stainless Steel TYPE 303 ASTM A276	Tyngsten Carbide /EPT or Silicon-Carbide/EPT	Copper & Brass C3600
STANDARD CONSTRUCTION	NSF 61	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
		250# FLANGE	Ductile Iron ASTM A536-84 Grade: 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
OPTIONAL		125# OR 250#	N/A	N/A	N/A	Bronze ASTM B584-98A C92200	N/A	N/A	N/A	N/A

N/A - Not Available




CI Series | Model: 2513D | 1760 RPM

Curve No. 4229 | Min. Imp. Dia. 9.5" | Size 3x2.5x13.5 | January 29, 2020

Comfort Solutions
A Taco Family Company

Energy Efficiency Rating: DOE Basic Model Number: CI2513D-4P-PM
Pump & Motor: PE_{CL}: 0.89 | ER_{CL}: 11

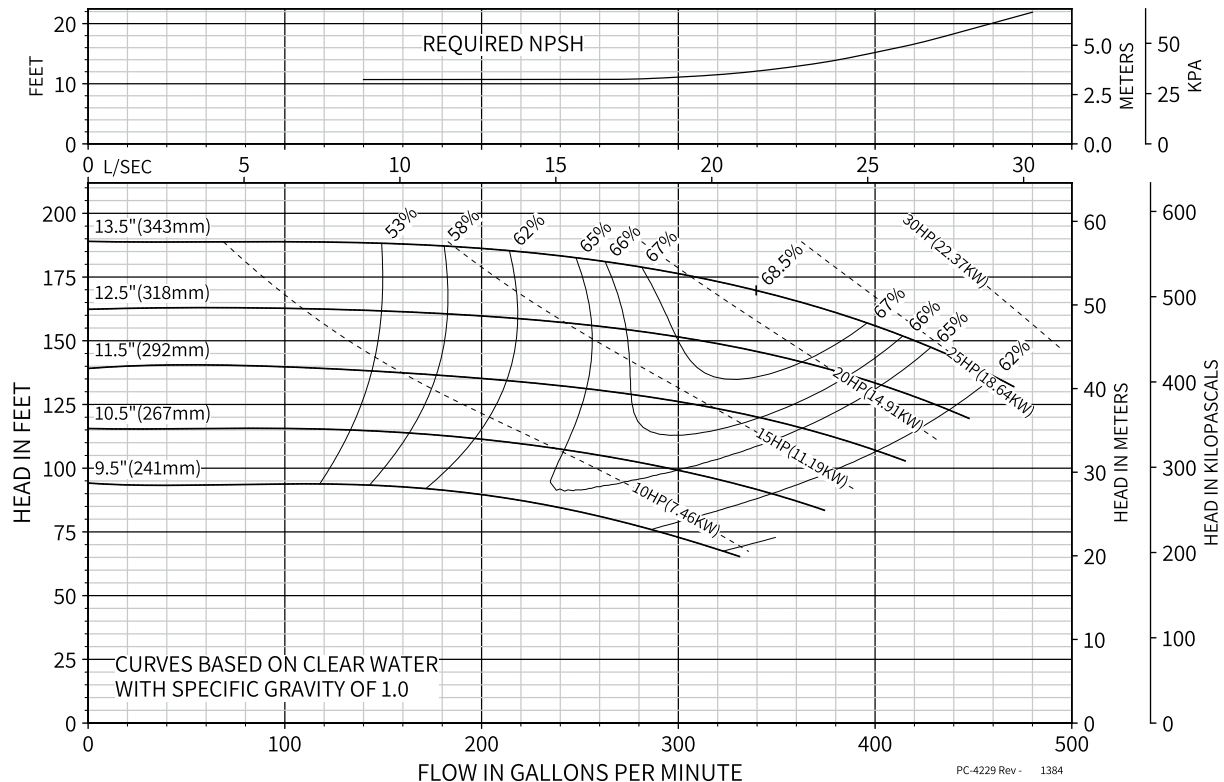

COMMENTS